

# Lecture 7

## IPv6 Network Addresses




# The Need for IPv6

- IPv6 is designed to be the successor to IPv4.
- Depletion of IPv4 address space has been the motivating factor for moving to IPv6.
- Projections show that all five RIRs will run out of IPv4 addresses between 2015 and 2020.
- With an increasing Internet population, a limited IPv4 address space, issues with NAT and an Internet of things, the time has come to begin the transition to IPv6!
- IPv4 has a theoretical maximum of 4.3 billion addresses, plus private addresses in combination with NAT.
- IPv6 larger 128-bit address space provides for 340 undecillion addresses.
- IPv6 fixes the limitations of IPv4 and includes additional enhancements, such as ICMPv6.

# IPv4 and IPv6 Coexistence

The migration techniques can be divided into three categories: Dual-stack, Tunnelling, and Translation.


## Dual-stack

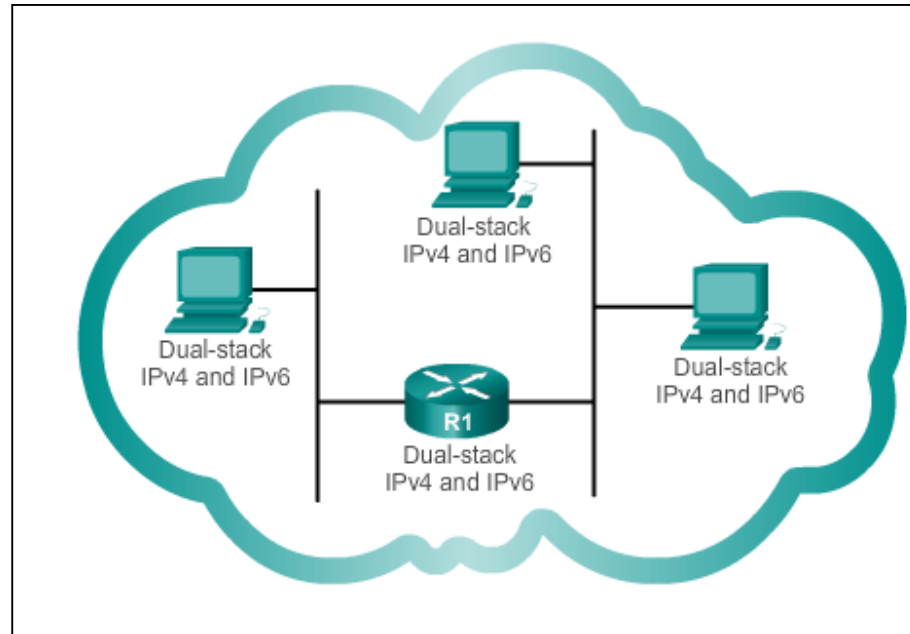

**Dual-stack:** Allows IPv4 and IPv6 to coexist on the same network. Devices run both IPv4 and IPv6 protocol stacks simultaneously.

# IPv4 and IPv6 Coexistence (cont.)


## Tunnelling

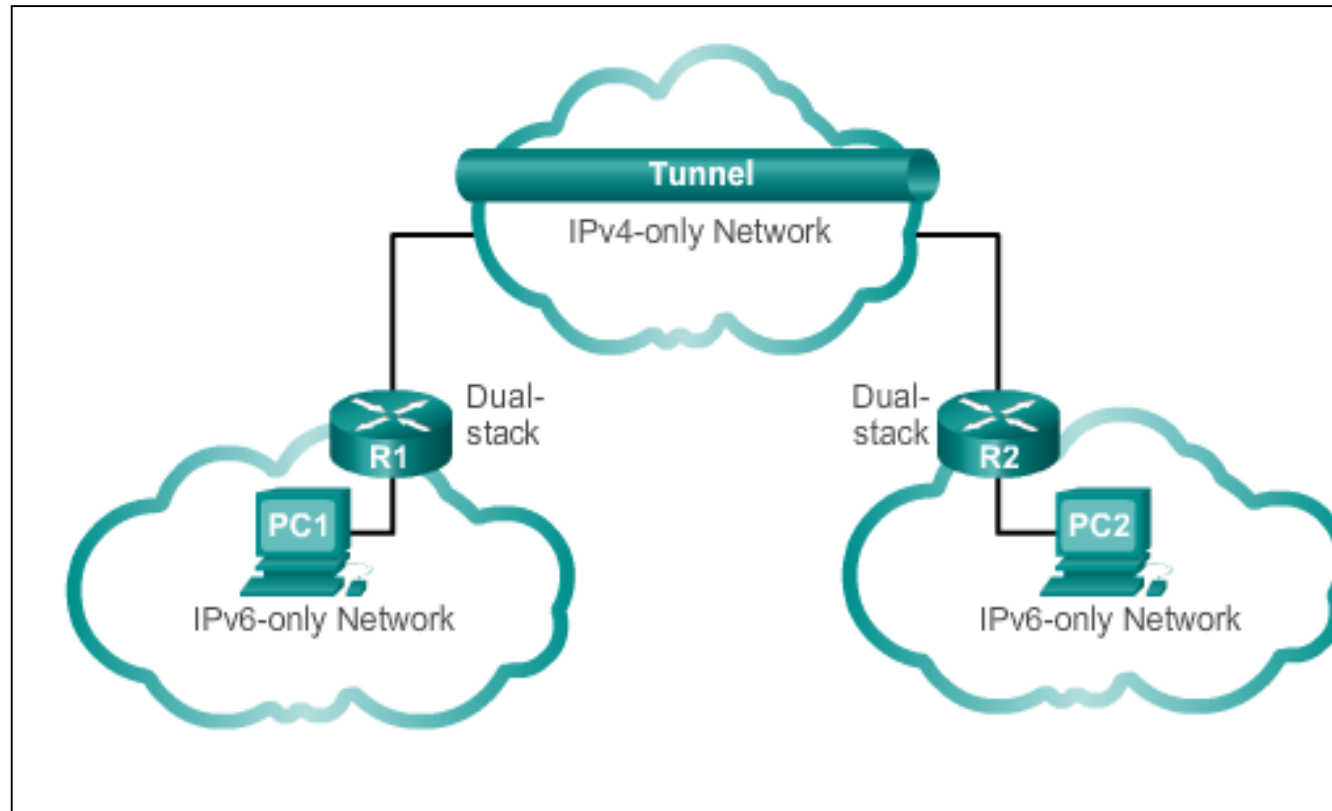

**Tunnelling:** A method of transporting an IPv6 packet over an IPv4 network. The IPv6 packet is encapsulated inside an IPv4 packet.

# IPv4 and IPv6 Coexistence (cont.)

## Translation

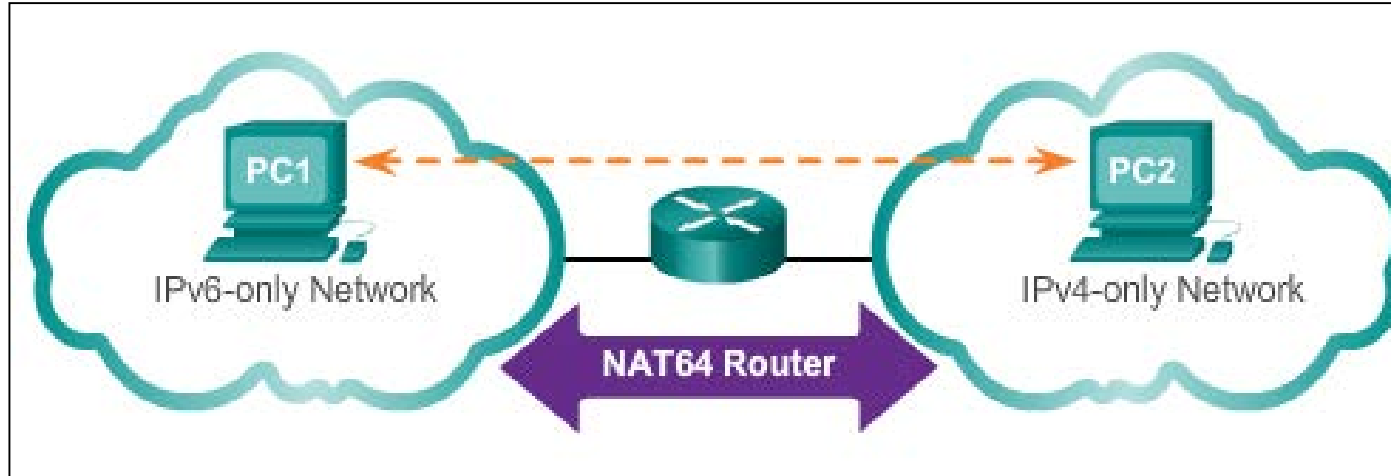

**Translation:** The Network Address Translation 64 (NAT64) allows IPv6-enabled devices to communicate with IPv4-enabled devices using a translation technique similar to NAT for IPv4. An IPv6 packet is translated to an IPv4 packet, and vice versa.

# Hexadecimal Number System

- Hexadecimal is a base sixteen system.
- Base 16 numbering system uses the numbers 0 to 9 and the letters A to F.
- Four bits (half of a byte) can be represented with a single hexadecimal value.

Hexadecimal	Decimal	Binary
0	0	0000
1	1	0001
2	2	0010
3	3	0011
4	4	0100
5	5	0101
6	6	0110
7	7	0111
8	8	1000
9	9	1001
A	10	1010
B	11	1011
C	12	1100
D	13	1101
E	14	1110
F	15	1111

# IPv6 Address Representation

- 128 bits in length and written as a string of hexadecimal values
- In IPv6, 4 bits represents a single hexadecimal digit, 32 hexadecimal value = IPv6 address
  - 2001:0DB8:0000:1111:0000:0000:0000:0200
  - FE80:0000:0000:0000:0123:4567:89AB:CDEF
- Hextet used to refer to a segment of 16 bits or four hexadecimals
- Can be written in either lowercase or uppercase

# Rule 1 – Omitting Leading 0s

- The first rule to help reduce the notation of IPv6 addresses is any leading 0s (zeros) in any 16-bit section or hextet can be omitted.
- 01AB can be represented as 1AB.
- 09F0 can be represented as 9F0.
- 0A00 can be represented as A00.
- 00AB can be represented as AB.

Preferred	2001:0DB8:000A:1000:0000:0000:0000:0100
No leading <u>0s</u>	2001: DB8: A:1000: 0: 0: 0: 100
Compressed	2001:DB8:A:1000:0:0:0:100



# Rule 2 – Omitting All 0 Segments

- A double colon (::) can replace any single, contiguous string of one or more 16-bit segments (hexets) consisting of all 0's.
- Double colon (::) can only be used once within an address otherwise the address will be ambiguous.
- Known as the *compressed format*.
- Incorrect address - 2001:0DB8::ABCD::1234.

# Rule 2 – Omitting All 0 Segments (cont.)

## Example #1

Preferred	2001:0DB8:0000:0000:ABCD:0000:0000:0100
Omit leading 0s	2001: DB8: 0: 0:ABCD: 0: 0: 100
Compressed	2001:DB8::ABCD:0:0:100
OR	
Compressed	2001:DB8:0:0:ABCD::100


Only one :: may be used.

## Example #2

Preferred	FE80:0000:0000:0000:0123:4567:89AB:CDEF
Omit leading 0s	FE80: 0: 0: 0: 123:4567:89AB:CDEF
Compressed	FE80::123:4567:89AB:CDEF

# IPv6 Prefix Length

- IPv6 does not use the dotted-decimal subnet mask notation
- Prefix length indicates the network portion of an IPv6 address using the following format:
  - IPv6 address/prefix length
  - Prefix length can range from 0 to 128
  - Typical prefix length is /64

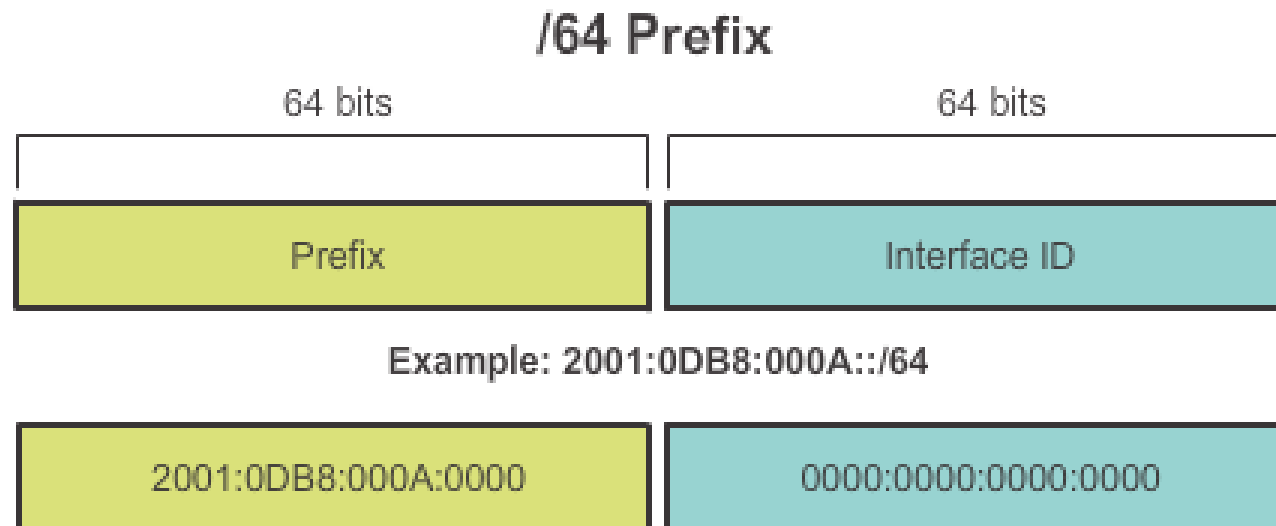


# IPv6 Address Types

There are three types of IPv6 addresses:

- Unicast
- Multicast
- Anycast.

**Note:** IPv6 does not have broadcast addresses.

# IPv6 Unicast Addresses (cont.)

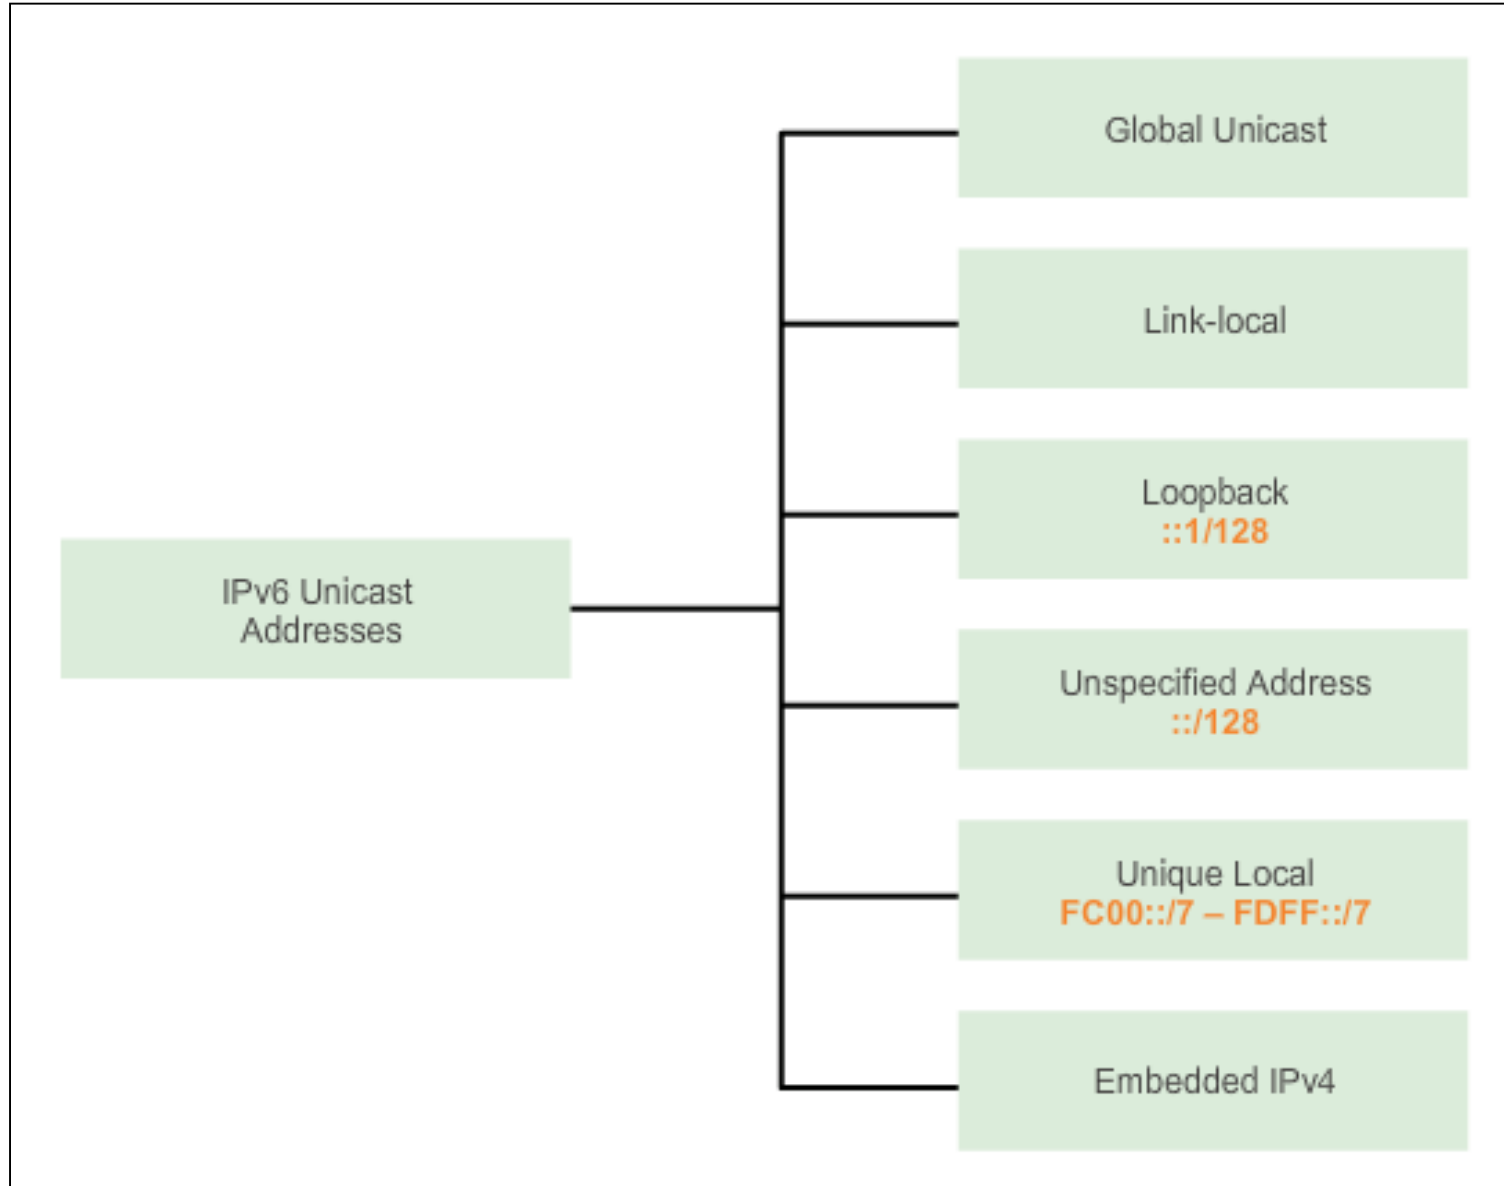

# IPv6 Unicast Addresses (cont.)

## Global Unicast

- Similar to a public IPv4 address
- Globally unique
- Internet routable addresses
- Can be configured statically or assigned dynamically

## Link-local

- Used to communicate with other devices on the same local link
- Confined to a single link; not routable beyond the link

# IPv6 Unicast Addresses (cont.)

## Loopback

- Used by a host to send a packet to itself and cannot be assigned to a physical interface.
- Ping an IPv6 loopback address to test the configuration of TCP/IP on the local host.
- All-0s except for the last bit, represented as `::1/128` or just `::1`.

## Unspecified Address

- All-0's address represented as `::/128` or just `::`
- Cannot be assigned to an interface and is only used as a source address.
- An unspecified address is used as a source address when the device does not yet have a permanent IPv6 address or when the source of the packet is irrelevant to the destination.

# IPv6 Unicast Addresses (cont.)

## Unique Local

- Similar to private addresses for IPv4.
- Used for local addressing within a site or between a limited number of sites.
- In the range of FC00::/7 to FDFF::/7.


## IPv4 Embedded (not covered in this course)

- Used to help transition from IPv4 to IPv6.




# IPv6 Link-Local Unicast Addresses

- Every IPv6-enabled network interface is **REQUIRED** to have a link-local address
- Enables a device to communicate with other IPv6-enabled devices on the same link and only on that link (subnet)
- FE80::/10 range, first 10 bits are 1111 1110 10xx xxxx
- 1111 1110 10**00 0000** (FE80) - 1111 1110 10**11 1111** (FEBF)

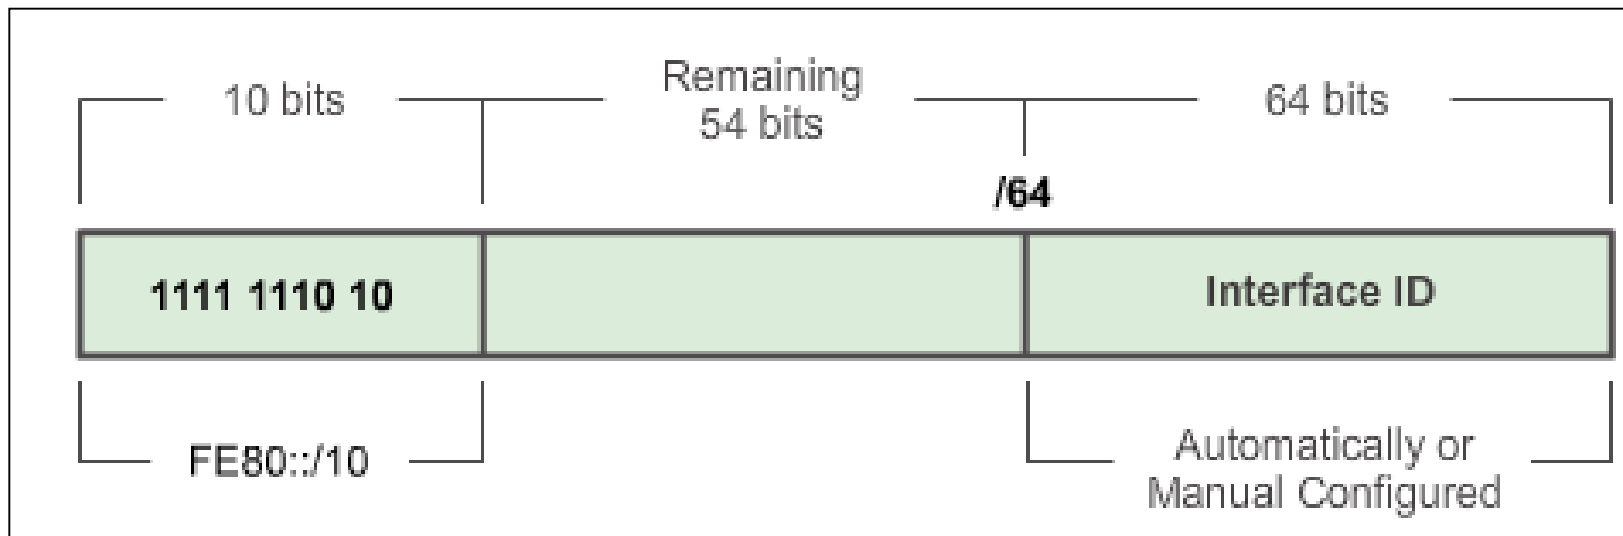

# IPv6 Link-Local Unicast Addresses (cont.)

Packets with a source or destination link-local address cannot be routed beyond the link from where the packet originated.

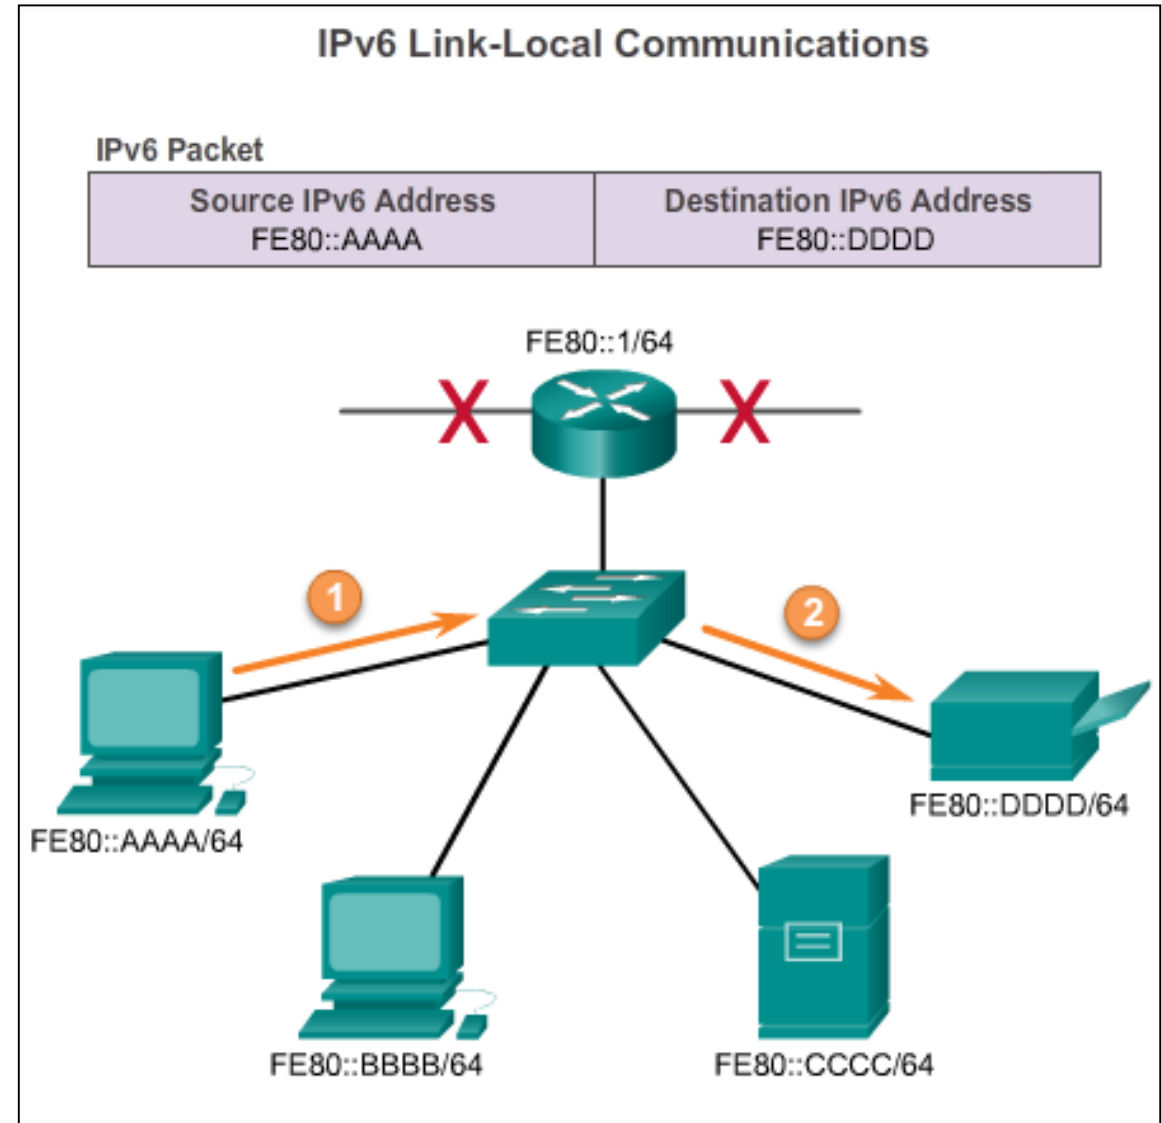


# Structure of an IPv6 Global Unicast Address

- IPv6 global unicast addresses are globally unique and routable on the IPv6 Internet
- Equivalent to public IPv4 addresses
- ICANN allocates IPv6 address blocks to the five RIRs

# Structure of an IPv6 Global Unicast Address (cont.)


Currently, only global unicast addresses with the first three bits of 001 or 2000::

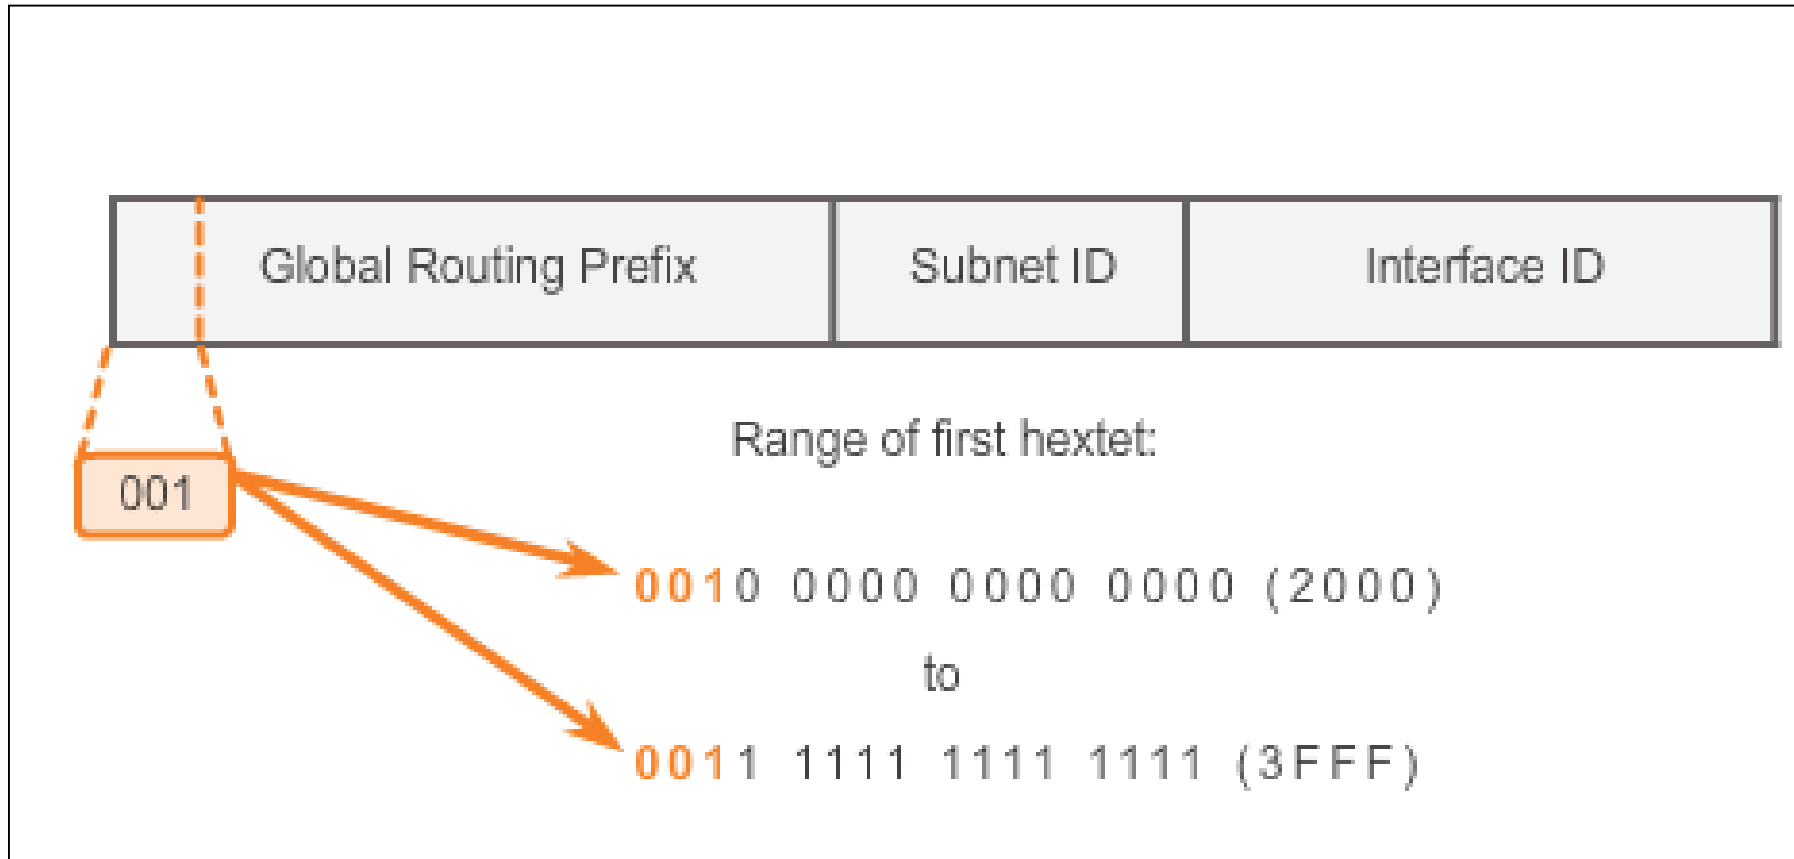


# Structure of an IPv6 Global Unicast Address (cont.)

A global unicast address has three parts: Global Routing Prefix, Subnet ID, and Interface ID.

- Global Routing Prefix is the prefix or network portion of the address assigned by the provider, such as an ISP, to a customer or site, currently, RIR's assign a /48 global routing prefix to customers.
- 2001:0DB8:ACAD::/48 has a prefix that indicates that the first 48 bits (2001:0DB8:ACAD) is the prefix or network portion.

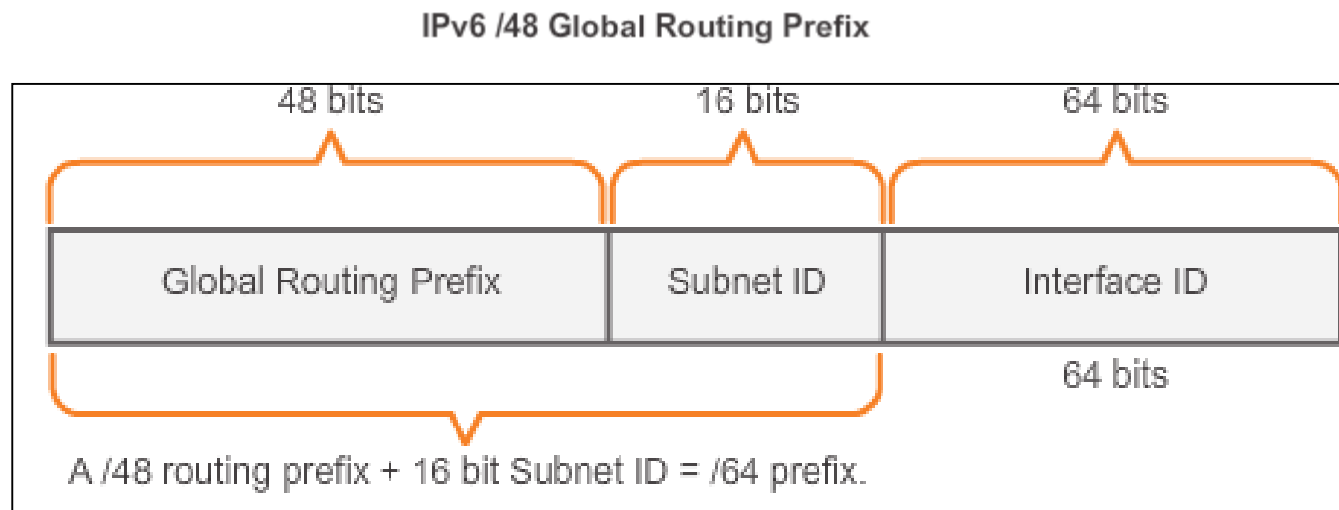

# Static Configuration of a Global Unicast Address

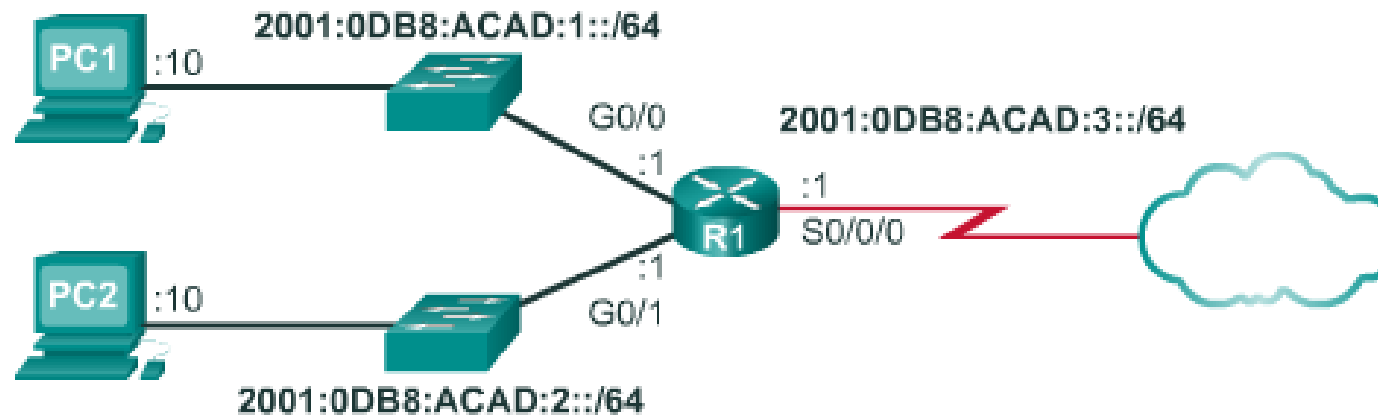

```
R1(config)#interface gigabitethernet 0/0
R1(config-if)#ipv6 address 2001:db8:acad:1::1/64
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface gigabitethernet 0/1
R1(config-if)#ipv6 address 2001:db8:acad:2::1/64
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface serial 0/0/0
R1(config-if)#ipv6 address 2001:db8:acad:3::1/64
R1(config-if)#clock rate 56000
R1(config-if)#no shutdown
```

# Static Configuration of an IPv6 Global Unicast Address (cont.)

## Windows IPv6 Setup

The screenshot shows the 'Internet Protocol Version 6 (TCP/IPv6) Properties' dialog box in Windows. The 'General' tab is selected. The dialog contains the following elements:

- General Tab:** A tab labeled 'General'.
- Introduction:** A text box stating: "You can get IPv6 settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IPv6 settings."
- IPv6 Addressing Options:**
  - Obtain an IPv6 address automatically
  - Use the following IPv6 address:
- Static IPv6 Address Fields:**
  - IPv6 address:
  - Subnet prefix length:
  - Default gateway:
- DNS Server Options:**
  - Obtain DNS server address automatically
  - Use the following DNS server addresses:
- Static DNS Server Fields:**
  - Preferred DNS server:
  - Alternate DNS server:
- Validation:**  Validate settings upon exit
- Buttons:** An 'Advanced...' button, an 'OK' button, and a 'Cancel' button.

# EUI-64 Process or Randomly Generated

## EUI-64 Process


- Uses a client's 48-bit Ethernet MAC address and inserts another 16 bits in the middle of the 46-bit MAC address to create a 64-bit Interface ID.
- Advantage is that the Ethernet MAC address can be used to determine the interface; is easily tracked.

EUI-64 Interface ID is represented in binary and comprises three parts:

- 24-bit OUI from the client MAC address, but the 7<sup>th</sup> bit (the Universally/Locally bit) is reversed (0 becomes a 1).
- Inserted as a 16-bit value FFFE.
- 24-bit device identifier from the client MAC address.




# EUI-64 Process or Randomly Generated (cont.)

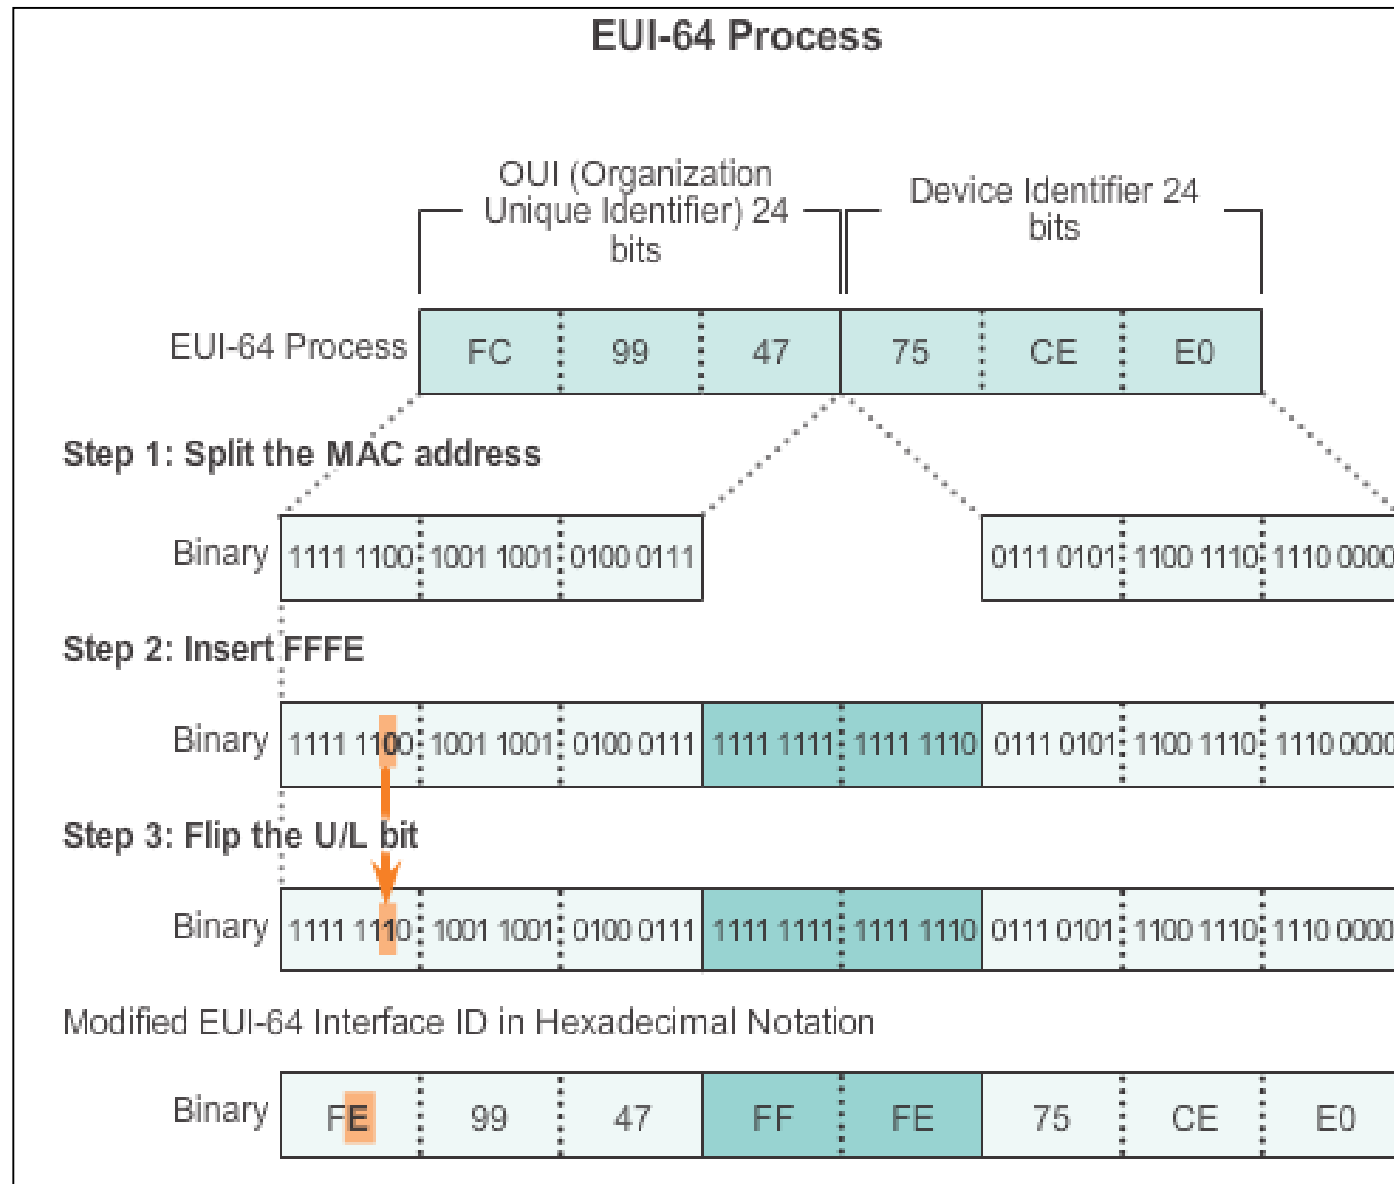

# EUI-64 Process or Randomly Generated (cont.)

```
R1#show interface gigabitethernet 0/0
GigabitEthernet0/0 is up, line protocol is up
  Hardware is CN Gigabit Ethernet, address is fc99.4775.c3e0
(bia fc99.4775.c3e0)
<Output Omitted>

R1#show ipv6 interface brief
GigabitEthernet0/0      [up/up]
  FE80::FE99:47FF:FE75:C3E0
  2001:DB8:ACAD:1::1
GigabitEthernet0/1      [up/up]
  FE80::FE99:47FF:FE75:C3E1
  2001:DB8:ACAD:2::1
Serial0/0/0             [up/up]
  FE80::FE99:47FF:FE75:C3E0
  2001:DB8:ACAD:3::1
Serial0/0/1             [administratively down/down]
  unassigned
R1#
```

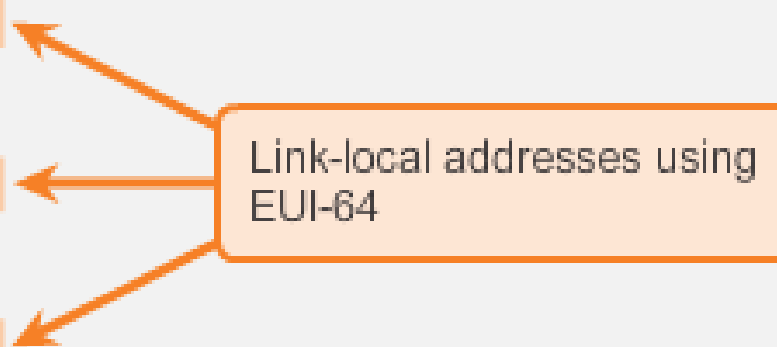

Link-local addresses using EUI-64

# EUI-64 Process or Randomly Generated (cont.)

## Randomly Generated Interface IDs

- Depending upon the operating system, a device can use a randomly generated Interface ID instead of using the MAC address and the EUI-64 process.

# Summary

- Each IPv6 address has 128 bits verses the 32 bits in an IPv4 address.
- The prefix length is used to indicate the network portion of an IPv6 address using the following format: IPv6 address/prefix length
- There are three types of IPv6 addresses: unicast, multicast, and anycast.
- An IPv6 link-local address enables a device to communicate with other IPv6-enabled devices on the same link and only on that link (subnet).
- Packets with a source or destination link-local address cannot be routed beyond the link from where the packet originated.
- IPv6 link-local addresses are in the FE80::/10 range.



Cisco | Networking Academy<sup>®</sup>  
Mind Wide Open<sup>™</sup>